Lever Handles



Stainless Steel hollow lever handles


ARGO

HS-501-A LC4
HS-503-A LC4
HS-504-A LC5
HS-506-A LC5
HS-507-A LC5
HS-508-A LC6
HS-509-A LC6
HS-512-A LC7
HS-520-A LC7
HS-527-A LC7
HS-528-B LC8
HS-529-C LC8
HS-530-A LC8
HS Rose Accessories LC10
HS Cylinder Escutcheons LC10
How to Order / Lever Function LC11
Installation Instruction LC12
LF-008 ..... LC13
LF-009 ..... LC13
LF-010 ..... LC14
LF-011 ..... LC14
LF-012 ..... LC14
LF-013 ..... LC15
LF-014 ..... LC15
LF-019 ..... LC15
LF Rose Accessories LC17
LF Cylinder Escutcheons LC17
Information LC18-19
Finishes LC20-22


stainless steel hollow lever handles



HS Series LC4-9

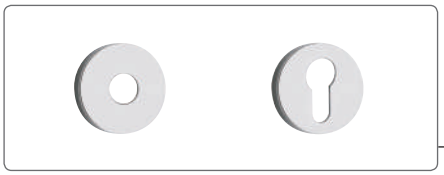


HS Roses Accessories & Cylinder Escutcheons LC10-11

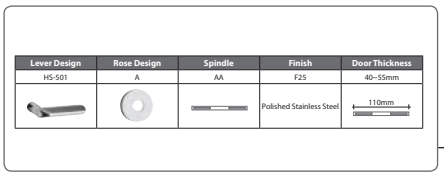


Lever Design	Rose Design	Spindle	Finish	Door Thickness
HS-501	A	AA	F25	40–55mm

How to Order LC11

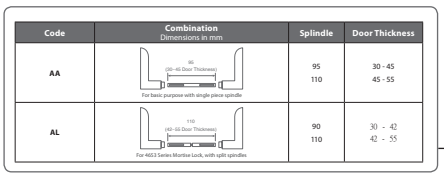


Code	Combination Dimensions in mm	Spindle	Door Thickness
AA	For basic purpose with single piece spindle	95 110	30 - 45 45 - 55
AL	For 4653 Series Mortise Lock, with split spindles	90 110	30 - 42 42 - 55


Lever Function LC11

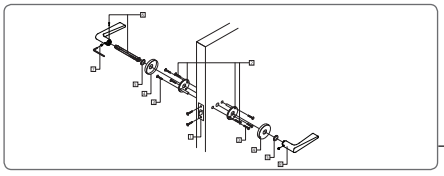


Installation Instruction LC12

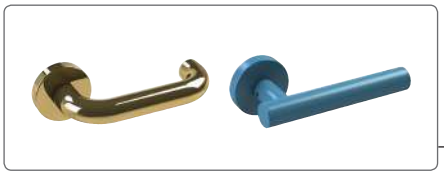


LF Series LC13-16

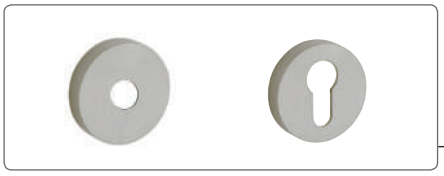

LF Roses Accessories & Cylinder Escutcheons LC17

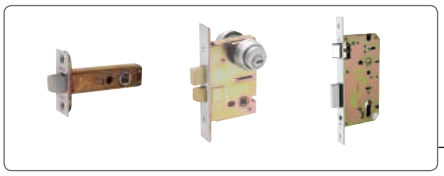

Information LC18-19

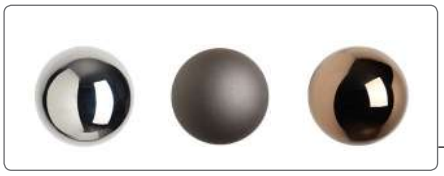

Finishes LC20-22

Numerous patents, copyrights, and trademarks are held by us to protect the integrity and reputation of our distinctive line of hardware appointments.
Manufacturer reserves all rights of any modification, materials and specifications without notice.

HS SERIES

Standard Finishes:
F24, F25,
F91~F102, F91T~F108T,
PVD (by request)

Stainless steel lever handles
Hollow style: light in weight, less burden to lock and latchbolt
Stainless Steel materials: corrosion-free with simple periodical care
Roses: spring loaded component preventing from sagging of levers

HS-501-A



F25



F102

HS-503-A



F24



F91

HS-504-A



F307



F302

HS-506-A



F24



F303

HS-507-A



F304




F99

HS SERIES

Standard Finishes:
F24, F25,
F91~F102, F91T~F108T,
PVD (by request)

Stainless steel lever handles
Hollow style: light in weight, less burden to lock and latchbolt
Stainless Steel materials: corrosion-free with simple periodical care
Roses: spring loaded component preventing from sagging of levers

HS-508-A

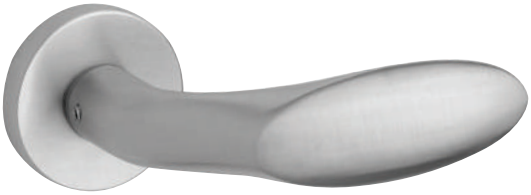

F24



F91

HS-509-A



F24



F97T

HS-512-A



F24




F93

HS-520-A



F97

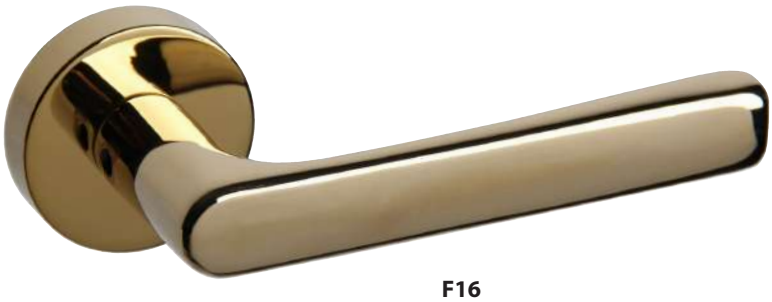

F16

HS-527-A



F101



F94

HS-528-B



F93




F17

HS-529-C



F25

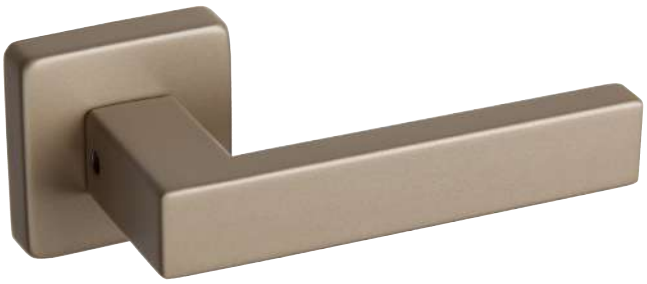


F101

HS-530-A




F104T

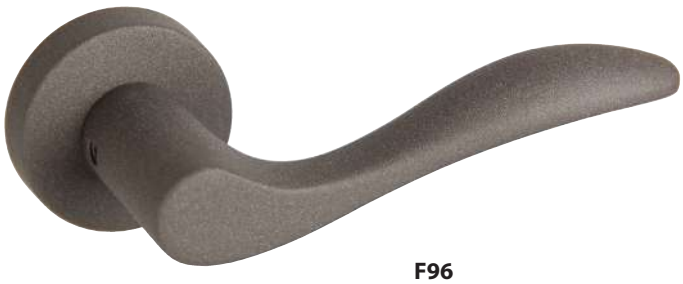


F96

HS SERIES


Dimensions
in millimeters




HS-501-A




HS-503-A




HS-504-A




HS-506-A




HS-507-A




HS-508-A




HS-509-A




HS-512-A




HS-520-A




HS-527-A



HS-528-B



HS-529-C




HS-530-A

ROSES ACCESSORIES

Roses (With spring cassette component)

cassette component

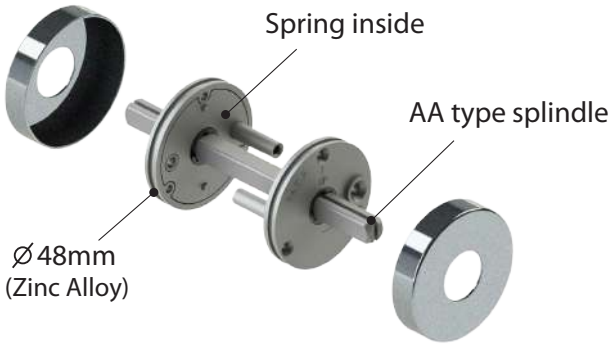

HS-A



HS-B



HS-C



CYLINDER ESCUTCHEONS

Euro Profile Cyl. Hole

cassette component



HS-AE



HS-BE




HS-CE




Roses Accessories & Cylinder Escutcheons


Dimensions in millimeters




HS-A




HS-B




HS-C



HS-AE




HS-BE



HS-CE


How to Order

Lever Design	Rose Design	Spindle	Finish	Door Thickness
HS-501	A	AA	F25	40~55mm
			Polished Stainless Steel	

Lever Function

Code	Combination Dimensions in mm	Spindle	Door Thickness
AA	 For basic purpose with single piece spindle	95 110	30 - 45 45 - 55
AL	 For 4653 Series Mortise Lock, with split spindles	90 110	30 - 42 42 - 55

Installation Instruction

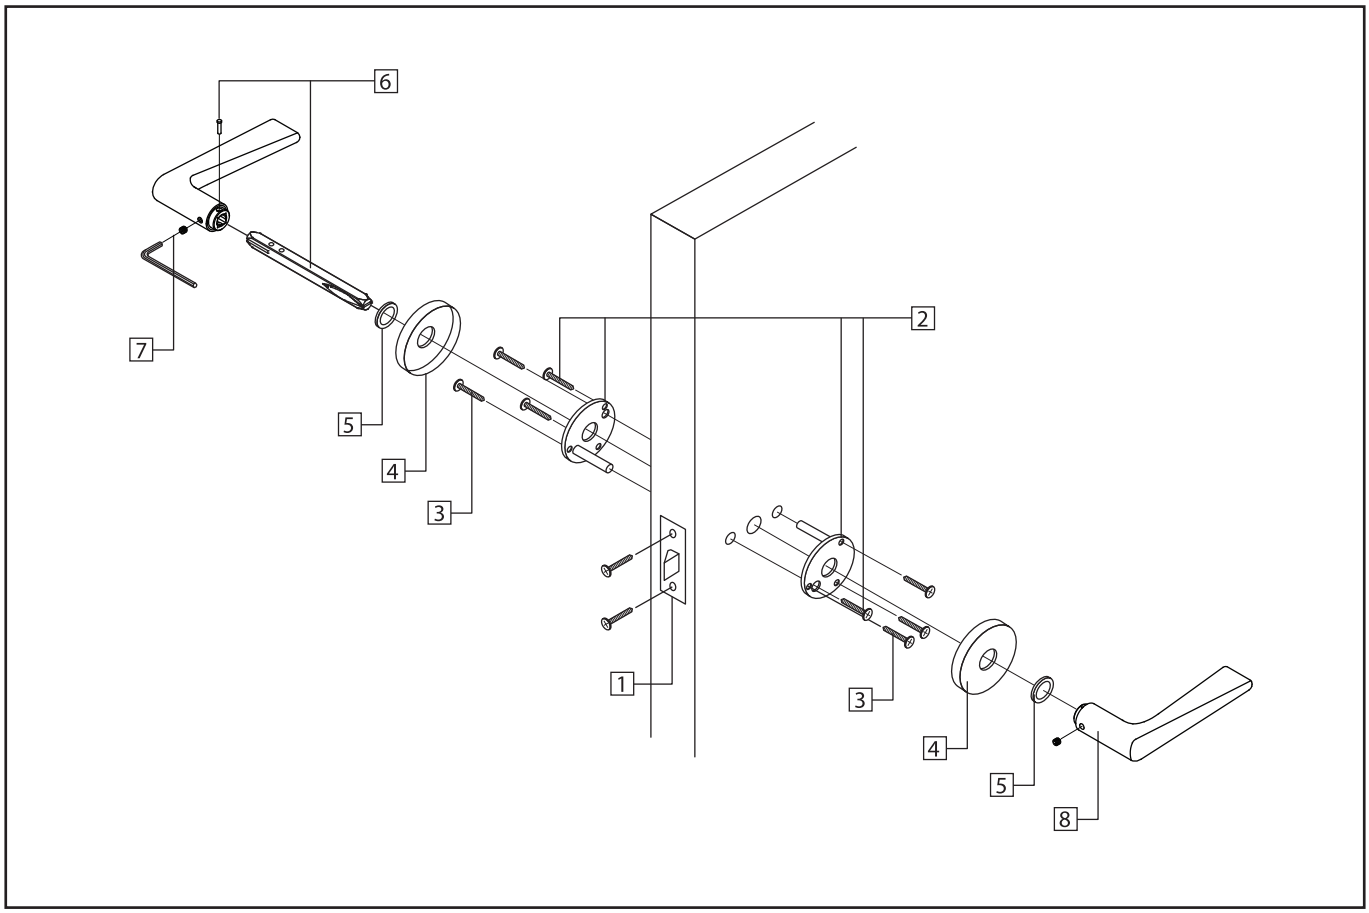

1. Install the latch or lockcase by inserting it into the cutout of the door.
2. Place the fixing brackets onto the door and fix them by tighten up two sets of (male and female screws) as shown in the diagram.
   (Note: Make sure the arrow indication is correct while fixing the inside and outside brackets)
3. Reinforce and secure the fixing brackets by additional screws.
4. Snap on the rose covers to the fixing brackets on both sides of the door.
5. Place two nylon washers onto the rose covers.
6. Insert the square spindle into the lever handle and secure with a pin.
7. Tighten and secure the outside lever with the little thread screw (Upper position of the lever).
8. Fix the inside lever to the spindle and tigthen up with the little thread screw (Make sure both of them are fixed firmly and seamlessly).

Preventing from forced pulling out


Outside lever has security pin in addition to the screws to prevent from forced pulling-out of the lever. Outside lever can be pulled out only when the inside fixing screw is loosen.

LF SERIES

Stainless Steel Levers
(Unspring type)

Standard Finishes:
F24, F25,
F91~F102, F91T~F108T,
PVD (by request)
Spindle: 8mm Square

LF-008

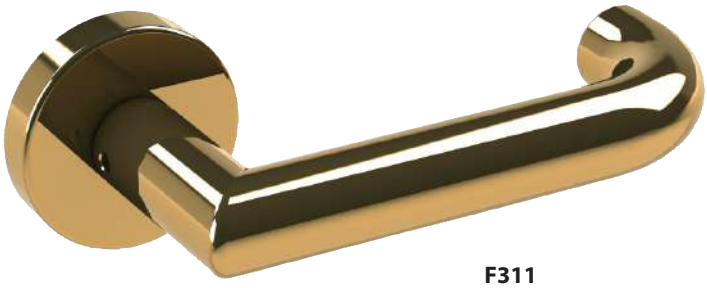


F311



F24

LF-009

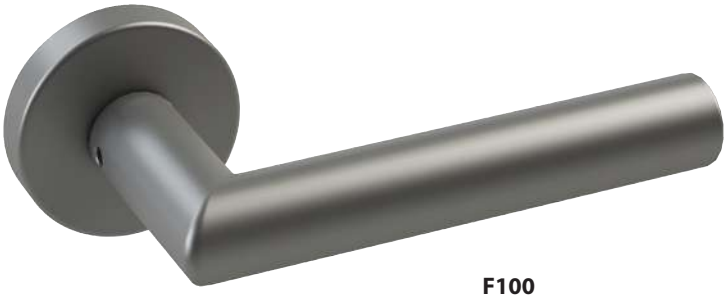

F100



F24

LF-010



F24



F306

LF-011



F24



F96

LF-012



F24



F16

LF-013



F24



F99

LF-014



F24




F97

LF-019



F25

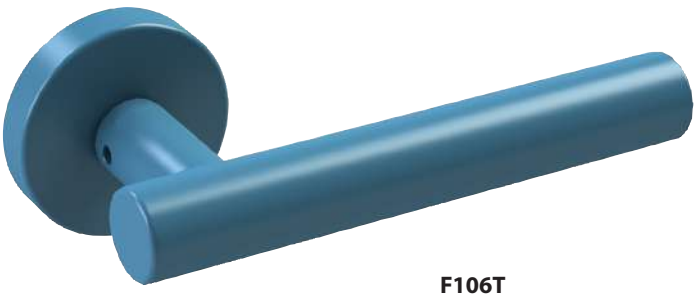


F106T


LF SERIES

Stainless Steel Levers
(Unspring type)


Dimensions
in millimeters




LF-008




LF-009




LF-010




LF-011




LF-012



LF-013



LF-014



LF-019


ROSE ACCESSORIES

Rose (Unspring type)

cassette component



(16.8mm hole for
LF Series Levers ONLY)



LF-A

LF-A




CYLINDER ESCUTCHEONS

Euro Profile Cyl. Hole

cassette component









LF-AE






LF-AE



Information

The Series below are recommended to use with **ARGO** lever handles and rose.

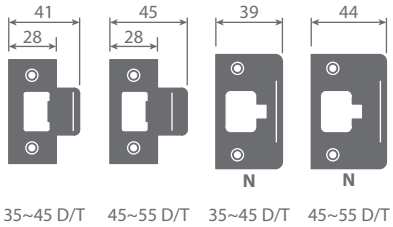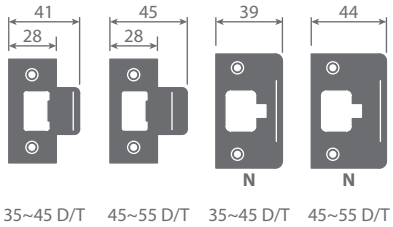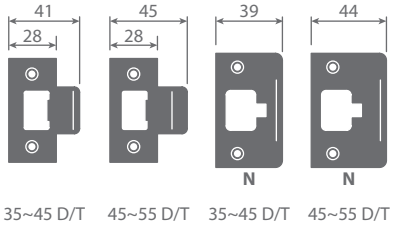Series	Backset	Door Thickness	Strike Plate Dimensions in mm	Photo	Spindle
5091SS or 5091SSN **Spring Latch**	60 & 70	35~55		 **Latch:** Stainless Steel, Reversible **Face & Strike Plate:** Stainless Steel	AA
5091E or 5091EN **Spring Latch**	60 & 70	35~55		 **Latch:** Zinc Alloy, Reversible **Face & Strike Plate:** Stainless Steel	AA
5091R or 5091RN **Spring Latch with Spring Hub**	60 & 70	35~55		 **Latch:** Stainless Steel, Reversible **Face & Strike Plate:** Stainless Steel	AA
LL Series	50	40~50			AA

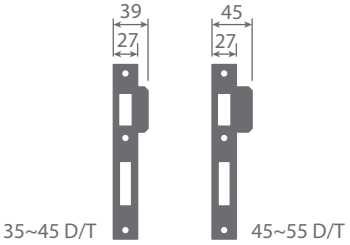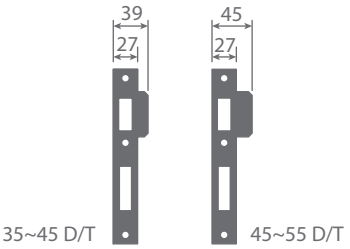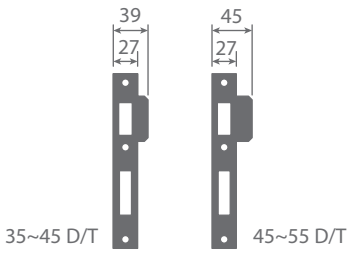Series	Backset	Door Thickness	Strike Plate Dimensions in mm	Photo	Spindle
CL Series	50	45~55			AA
CLQ Series	70	45~55			AA
4626 Series	60 & 70	35~55			AA
4650 Series	60 & 70	35~55			AA
4653 Series	60/70	35~55			AA/AL

SUS Finishes List

ARGO	Description	ARGO	Description
	**F24** Satin stainless steel		**F25** Polished stainless steel

APC Finishes List

ARGO	Description	ARGO	Description
	**F91** Matt black powder coating		**F91T** Matt black powder coating with rough surface
	**F93** Matt white powder coating		**F93T** Matt white powder coating with rough surface
	**F94T** Matt light grey powder coating with rough surface		**F96T** Matt dark grey powder coating with rough surface
	**F97** Matt brown powder coating		**F97T** Matt brown powder coating with rough surface
	**F99** Matt champagne silver powder coating		**F100** Matt silver grey powder coating

ARGO	Description	ARGO	Description
	**F100T** Matt silver grey powder coating with rough surface		**F101** Matt champagne gold powder coating
	**F102** Matt antique brass gold powder coating		**F102T** Matt antique brass gold powder coating with rough surface
	**F104T** Matt light green powder coating with rough surface		**F105T** Matt dark green powder coating with rough surface
	**F106T** Matt light blue powder coating with rough surface		**F107T** Matt dark blue powder coating with rough surface
	**F108T** Matt rose gold powder coating with rough surface		

PVD Finishes List

ARGO	Description	ARGO	Description
	**F16** Polished brass		**F17** Brushed brass
	**F301** Polished bronze		**F302** Brushed bronze
	**F303** Brushed chrome		**F304** Red gold
	**F305** Brushed red gold		**F306** Polished black chrome
	**F307** Brushed black chrome		**F308** Steel optic
	**F310** Polished nickel		**F311** Gold optic
	**F316** Brushed nickel		



www.argo-hardware.com

AG-002-2601